

### Appliances Listed For Use With B-Vent Appliances

#### Gas Vent Capacity For Deflecto's Easy-Liner® Chimney Liners


(Liners Derated 20% From B-Vent Tables)

HEIGHT "H"	CONNECTOR "C"	LATERAL "L"	EASY-LINER® COMMON VENT DIAMETER – "D" (INCHES)																	
			3"			4"			5"			5 1/2"			6"			7"		
			APPLIANCE INPUT RATING IN THOUSANDS OF BTU PER HOUR																	
			FAN NAT			FAN NAT			FAN NAT			FAN NAT			FAN NAT			FAN NAT		
min	max	max	min	max	max	min	max	max	min	max	max	min	max	max	min	max	max	min	max	max
15'	DOUBLE	5'	22	52	36	30	104	70	39	175	114	43	215	143	49	264	174	64	370	240
		10'	29	47	33	40	97	66	51	165	108	54	207	136	64	252	166	84	356	230
	SINGLE	5'	*	*	35	75	102	69	102	173	112	120	214	140	144	261	174	182	367	238
		10'	*	*	31	*	*	63	128	161	105	150	207	130	182	246	162	228	350	227
25'	DOUBLE	5'	21	60	41	29	121	82	37	207	135	40	258	168	46	316	206	60	448	289
		10'	28	54	38	38	113	77	49	197	129	53	249	160	61	303	196	79	432	277
	SINGLE	5'	49	57	40	73	119	80	99	204	132	116	255	165	139	312	204	175	444	287
		10'	*	*	*	95	109	74	124	191	126	147	220	154	174	297	193	218	425	274
30'	DOUBLE	5'	21	62	43	28	128	86	36	220	141	40	275	178	45	337	218	58	480	308
		10'	27	56	40	37	120	82	48	210	137	53	265	172	59	324	209	77	464	297
	SINGLE	5'	49	59	42	72	126	85	98	217	138	115	275	175	136	334	217	171	476	306
		10'	*	*	*	91	115	78	122	204	134	145	258	168	171	318	206	213	456	294
35'	DOUBLE	5'	21	63	32	28	132	88	36	228	146	39	285	183	45	350	225	57	501	319
		10'	27	57	30	37	124	84	47	217	141	52	275	175	58	337	216	76	484	308
	SINGLE	5'	49	60	*	72	129	87	97	224	143	115	285	180	135	347	224	169	496	317
		10'	*	*	*	91	118	83	121	212	138	143	270	173	169	331	213	211	476	305
45'	DOUBLE	5'	21	63	*	28	139	93	36	243	156	39	310	198	44	377	239	57	542	340
		10'	27	60	*	36	131	89	47	232	149	50	297	187	58	364	231	75	525	330
	SINGLE	5'	49	65	*	71	136	92	96	239	153	114	304	195	134	373	238	168	537	338
		10'	*	*	*	90	125	*	120	227	146	140	290	185	167	356	227	208	517	326

CHART REVISED: MAR 2000

\* NOT RECOMMENDED

### ONE APPLIANCE

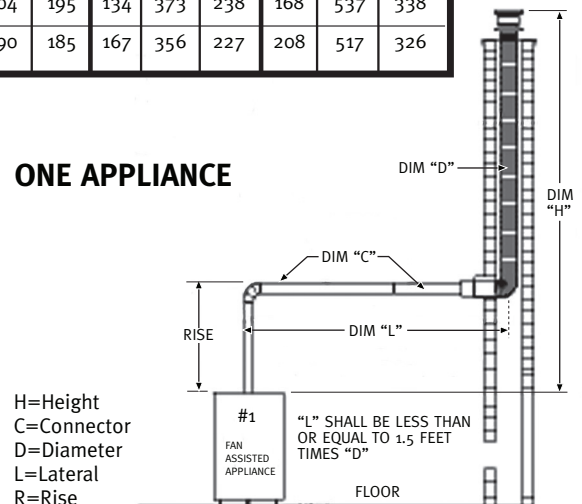

09/07

©2007  
DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com  
DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.

LK425tps-c