


www.advp-deflecto.com

Technical Product Specification

DAC_C -Duct Connector - Aluminum with Bead and Crimp



Model	Description	Color
DAC3C	3" aluminum connector	silver
DAC4C	4" aluminum connector	silver
DAC5C	5" aluminum connector	silver
DAC6C	6" aluminum connector	silver

Performance Data

For Aluminum Connectors

CONNECTOR

- Aluminum
- One piece

MAXIMUM VELOCITY

• 5000 FPM / 25m/sec

OPERATING TEMPERATURE RANGE

•-100F to 430F/-73C to 221C Intermittent

FLAME SPREAD/SMOKE


DEVELOPED

• 0/0

Model	Α	Thickness
DAC3C	3" dia.	30 ga.
DAC4C	4" dia.	30 ga.
DAC5C	5" dia.	30 ga.
DAC6C	6" dia	30 ga

General Information

- easily connects duct together
- duct slides over aluminum connector
- crimp allows for easy installation
- bead gives strength to connection

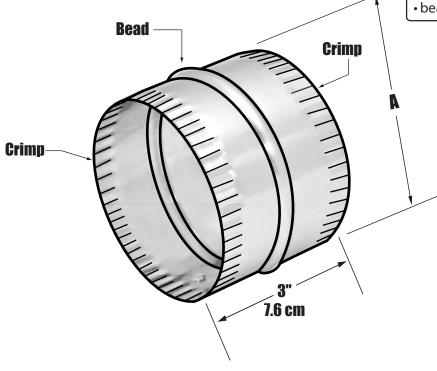

5/09 © 2009

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com
DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com
Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.