


www.advp-deflecto.com

Technical Product Specifications

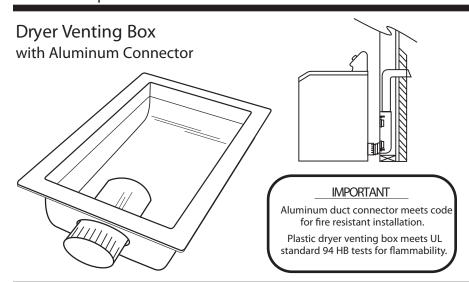

Model No.	Description
DVBOX	Dryer Venting Box with Aluminum Connector

Performance Data

Materials

for plastic dryer venting box

- high impact polystyrene
- meets UL Standard 94 HB tests for flammability


for aluminum duct connector

• Aluminum 3000 series

General Information

- saves space
 - recessed design for placement behind drywall
 - allows dryer to sit 4-6" closer to wall
- improves dryer efficiency
 - ensures a direct path between dryer and vent resulting in better air flow, reduced energy bills
- reduces fire hazard
 - no more kinks that result in lint build-up which can lead to fires
- ensures clean appearance
 - eliminates exposed drywall cuts
- · installs easily
 - regardless of distance between studs, the mounting straps may be adjusted to ensure a stable, permanent installation

Dimensions of Finish Trim Plate

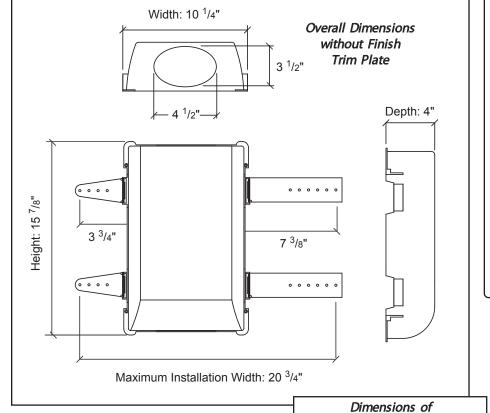

Height: 17 1/4"

6/05 © 200

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations. Rev.Oct 26 2005

Aluminum Connector

Length: 9" Diameter: 4"

DVBOXtps-A

1 ⁵/16"