

www.advp-deflecto.com

Technical Product Specifications

Description

Hood/pipe assem.

Hood/pipe unassem.

Hood

Hood

Color

White

White

White

White

Model No.

GVHAW4

GVHXW4

GH4W


Hood

Pipe

Collar Styrene

GHR4W

Dryer Vent - 4"(10.1cm) Supurr Guard Vent Hood with removable guard, aluminum pipe and collar





GVHAW4, GVHXW4

GH4W, GHR4W



General Information

• 4" (10.1cm) dia. opening

Performance Data for plastic molded louvered vent hoods

UV Inhibitor added


Aluminum

Calcium filled Polypropylene Melting point: 325 °F / 163 C

• quick, easy installation


Supurr Guard Hood


- durable, weather resistant, limited lifetime guaranteed
- hood louvered dampers operates quietly for maximum exhaust air flow and seals when not in operation to help prevent back drafts
- removable bird guard helps prevent birds and rodents from entering home through your dryer vent

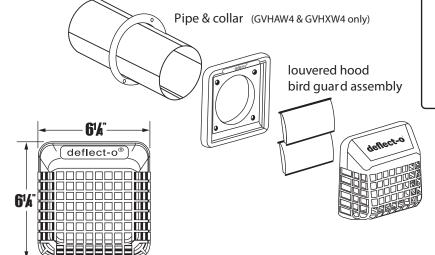



Plastic collar (GVHAW4 & GVHXW4 only)





Molded for easy connection of pipe

Rear View

Side View

6/01 © 2001

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.