



## **Technical Product Specifications**

## ISP - Insulating Sleeves- For 3"(7.5cm) to 14"(35.5cm) dia's

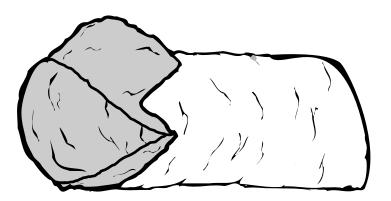

Black Poly Jacket Insulating Sleeves

Model No.	Description	
ISP045	for 3"& 4"dia. duct, 5 ft. length	
ISP0410	for 3"& 4"dia. duct, 10 ft. length	
ISP055	for 4"& 5"dia. duct, 5 ft. length	
ISP0510	for 4"& 5"dia. duct, 10 ft. length	
ISP065	for 5"& 6"dia. duct, 5 ft. length	
ISP0610	for 5"& 6"dia. duct, 10 ft. length	
ISP075	for 6"& 7"dia. duct, 5 ft. length	
ISP0710	for 6"& 7"dia. duct, 10 ft. length	
ISP085	for 7"& 8"dia. duct, 5 ft. length	
ISP0810	for 7"& 8"dia. duct, 10 ft. length	
ISP105	for 9"& 10"dia. duct, 5 ft. length	
ISP1010	for 9"& 10"dia. duct, 10 ft. length	
ISP 125	for 11"& 12"dia. duct, 5 ft. length	
ISP1210	for 11"& 12"dia. duct, 10 ft. length	
ISP145	for 13"& 14"dia. duct, 5 ft. length	
ISP1410	for 13"& 14"dia. duct, 10 ft. length	

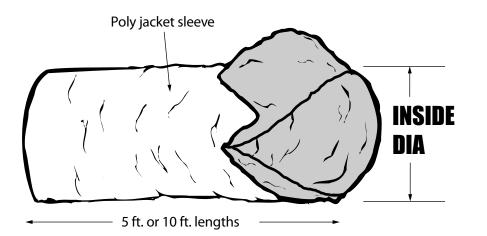

	_	
	formance	
Per	formance	Data
	Ullingue	Dutu

for insulating sleeves

## Material

- insulated poly jacket sleeve lined by R4.2, R6 and R8 insulation
- in 10 ft(3m)& 5ft(1.5m) lengths

## General Information

- ideal for adding insulation to new or existing hard pipe, semi-rigid, or flex duct
- increases the efficiency of warm or cool air traveling through the duct
- helps un-insulated duct from condensating or sweating in certain applications

Class 1 Surface Burning Characteristics Max Flame spread 25 Max Smoke Developed 50



Thermal Performance

