




www.advp-deflecto.com

Technical Product Specifications

Lint Trap - Indoor Dryer Venting w/ Supurr-Flex [®] Flexible Metallic Duct

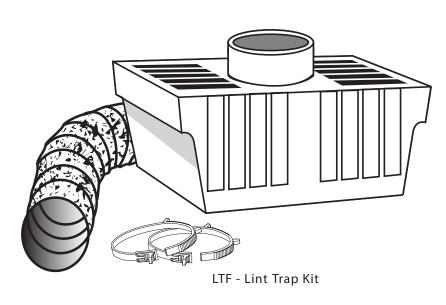

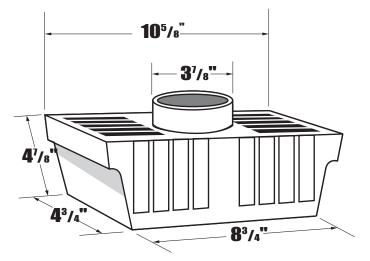




Model No.	Description	Color
LTF	Lint Trap w/ Supurr Flex *	White
Performance Data		
for all plastic molded lint trap kits		
Material		
 Calcium filled polypropylene (container) Supurr-Flex[*] flexible metallic duct 		
Melting Point		
• 325°F+ (container)		
Operating Temperature Range		
• 265°F (flex duct)		

General Information

- designed for safe indoor dryer venting where outside venting is impossible
- quick, easy installation, fits any clothes dryer
- please follow these safety warnings:
 do not use with gas clothes dryer
 - ► in small room open doors for adequate distribution of heat and moisture
 - some building codes may restrict the use of this product, always check the the local codes in your area



Note: Fill trap with water to 1" line indi cated, replace lid. Replace lint filled water as needed. Because unit traps excessive moisture from dryer air, check water level on regular basis.

©2010

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.