


# **Technical Product Specifications**

## OSB - Oval Straight Boot, Galvanized



OSB

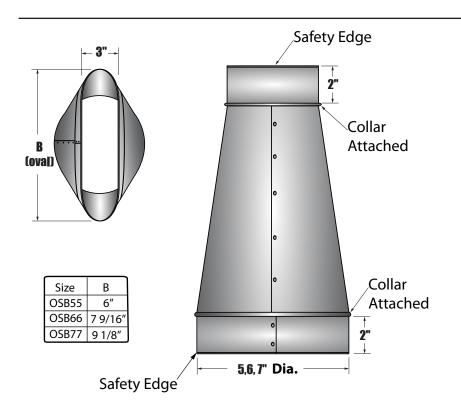

#### **Oval Boot** Model Description Galvanized Oval Straight Boot, 5" OSB55 Oval to 5" Round (12.7 x 12.7cm) Straight Transition Galvanized Oval Straight Boot, 6" Oval to 6" Round (15.2 x 15.2cm) OSB66 Straight Transition Galvanized Oval Straight Boot, 7" Oval to 7" Round (17.7 x 17.7cm) OSB77 Straight Transition Performance Data

- for galvanized round to oval transitions
- Material
- galvanized sheet metal (standard)


### Construction

dimple lock

Operating Temperature Range •-100 F to 430 °F / -73°C to 221 C

## General Information

- connecting collars with smooth edge for safety
- Allows for connection to oval pipe • Transition from round to oval pipe



11/13 © 2013 DEFLECTO Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.