


Technical Product Specifications

Bathroom Vent Kit - Supurr Guard[®] Hood with pipe & collar, Supurr-Flex[®] UL 181 Class 1 Connector Duct, 3" - 4" increaser & 2 clamps

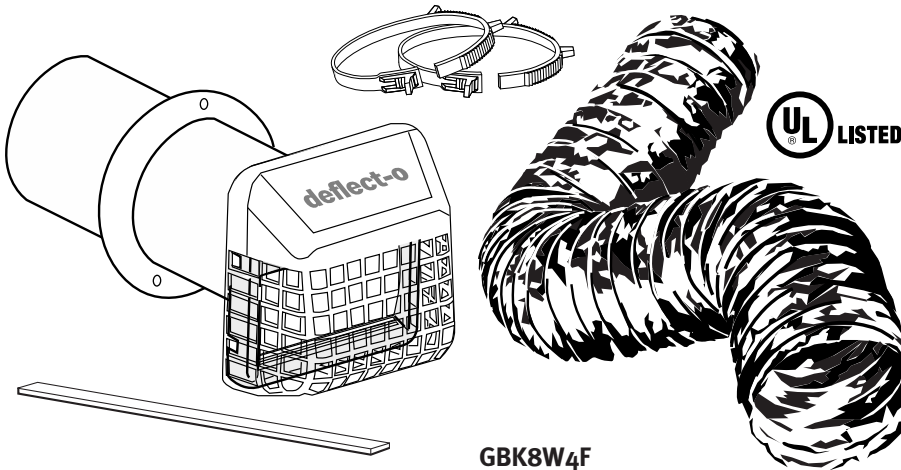

Model No.	Description	Color
GBK8W4F	Bathroom Vent Kit	White

Performance Data

for Bathroom Vent Kit

Hood

- Calcium filled Polypropylene
- Melting point: 325° F approx.
- UV Inhibitor added

Pipe

- Aluminum

Collar

- Styrene

Clamps

- 4" dia., polypropylene plastic

Duct

- 4" dia. Supurr-Flex[®] UL 181 Class 1 Air Connector Duct, aluminum flexible

Operating Temperature Range

- 265°F


General Information

Supurr-Flex[®] Duct

- fire resistant, flexible duct
- UL Listed

Supurr Guard[®] Hood

- durable, weather resistant, limited lifetime guaranteed
- hood louvered dampers operates quietly for maximum exhaust air flow and seals when not in operation to help prevent back drafts
- removable bird guard helps prevent birds and rodents from entering home through your bathroom vent

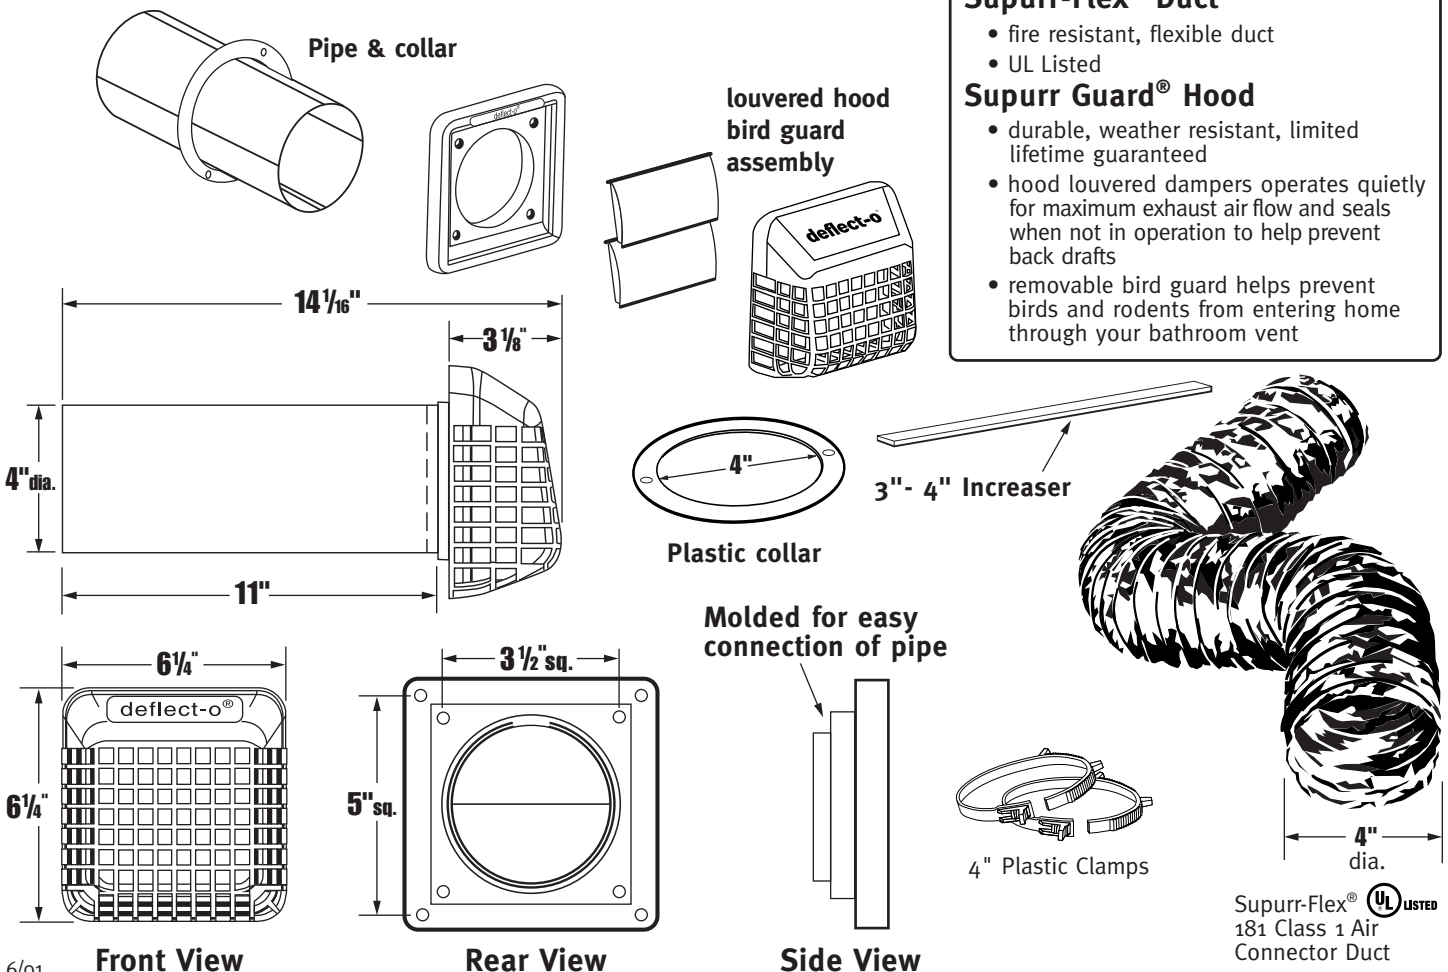

6/01

© 2001
 DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com
 DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.

GBK8W4Ftps