


Technical Product Specifications

Dryer Vent - 4" Supurr Guard[®] Vent Hood with removable guard, aluminum pipe and collar

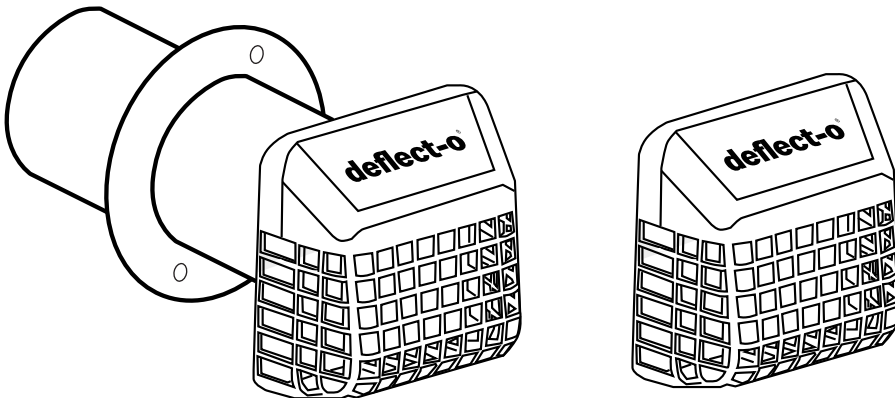

GVHAW₄, GVHXW₄

GH4W, GHR4W

Model No.	Description	Color
GVHAW ₄	Hood/pipe assem.	White
GVHXW ₄	Hood/pipe unassem.	White
GH4W	Hood	White
GHR4W	Hood	White

Performance Data

for plastic molded louvered vent hoods

Hood

- Calcium filled Polypropylene
- Melting point: 325° F+
- UV Inhibitor added

Pipe

- Aluminum

Collar



- Styrene

General Information



- 4" dia. opening
- quick, easy installation

Supurr Guard[®] Hood

- durable, weather resistant, limited lifetime guaranteed
- hood louvered dampers operates quietly for maximum exhaust air flow and seals when not in operation to help prevent back drafts
- removable bird guard helps prevent birds and rodents from entering home through your dryer vent

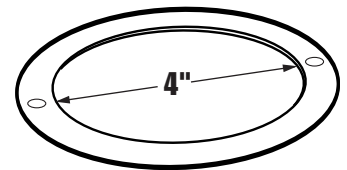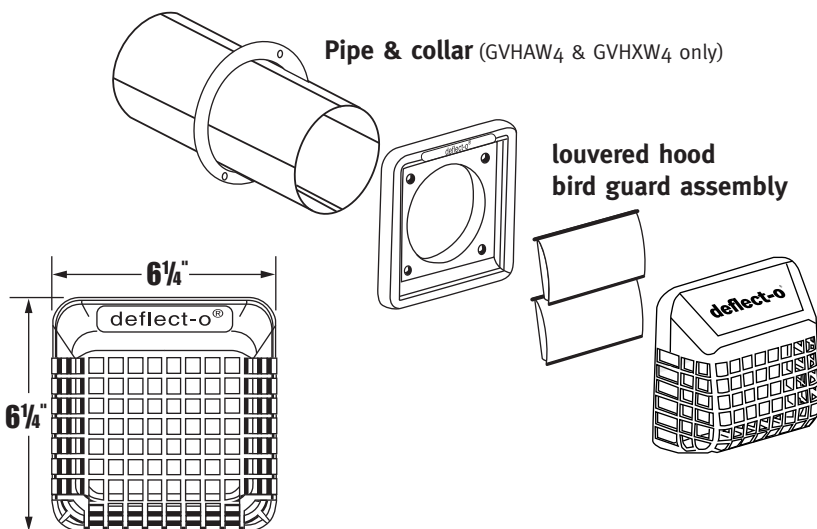

Plastic collar
(GVHAW₄ & GVHXW₄ only)

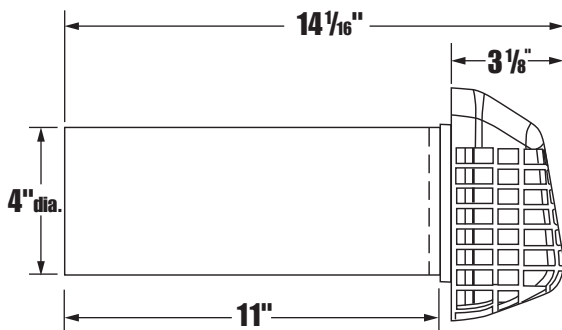

Rear View

Molded for easy connection of pipe



Side View

6/01

© 2001

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com
DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.

GVHAW₄tps