

Supurr-Flex[®] pure aluminum, multi-layered flexible metallic duct, UL Listed 181 Class 1 Air Connector



TF420, TF620

Model No.	Description
TF420	Supurr-Flex [®] alum. metallic duct
TF620	Supurr-Flex [®] alum. metallic duct

Performance Data

for uninsulated aluminum, flexible metallic duct

Maximum Velocity

- 4000 FPM

Maximum Rated Pressures

- all diameters 8" w.g. Pos.
- 3"-6" dia., -4.0" w.g. Neg.

Operating Temperature Range

- 0°F to 265°F



Pressure Drops (see chart)

UL Listed 181 Class 1 Air Connector

General Information

- UL Listing on this product is for installations of 14 ft. or less
- for heating, cooling & exhaust
- compressed length . . . 20 ft. to 14" +/-
- fire retardant, NO exposed polyester inside or outside

Pressure Loss Diagram

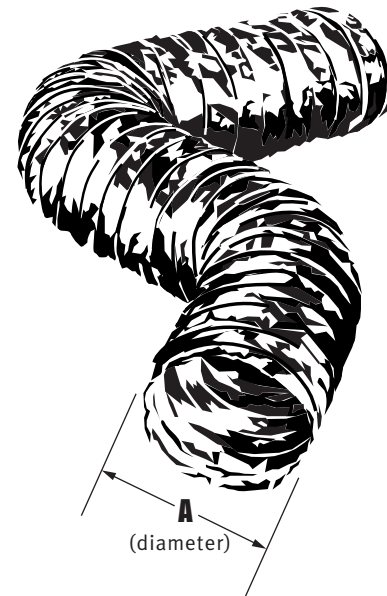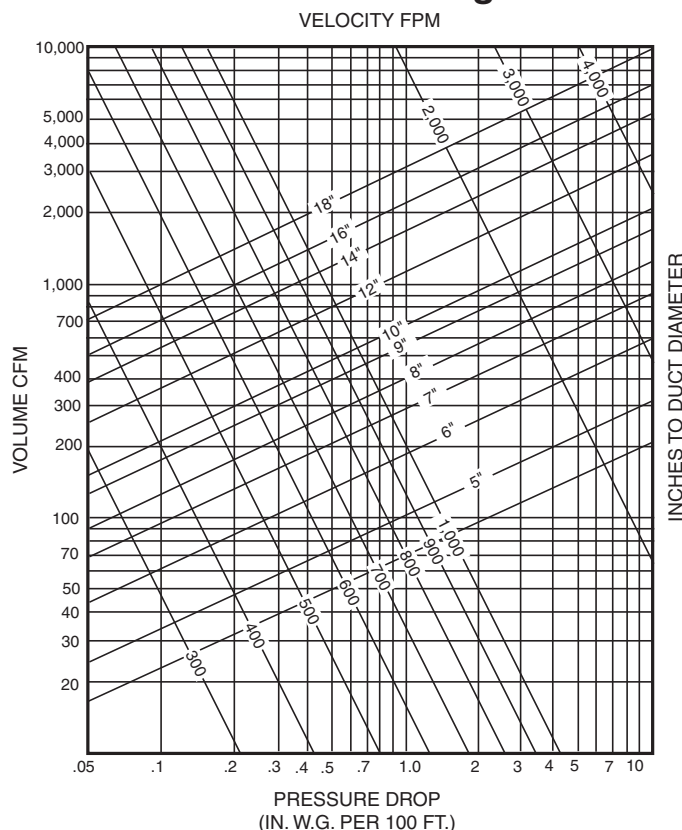

Model No.	diameter	length
TF420	4" dia.	20 ft.
TF620	6" dia.	20 ft.