


### Dryer Vent - 4" Supurr-Vent® Louvered Vent Hood, with aluminum pipe and collar

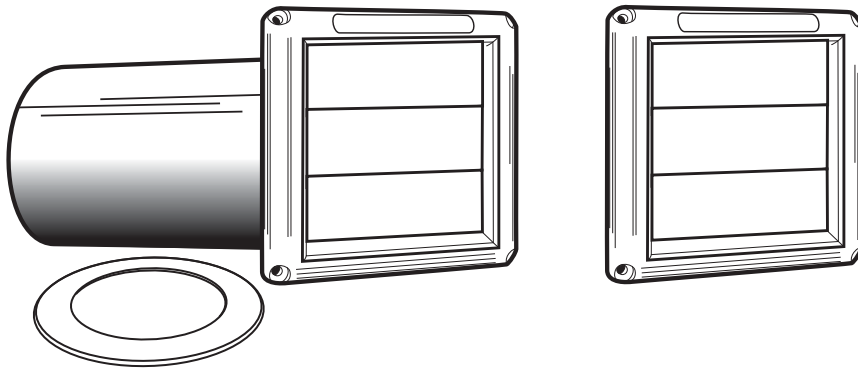

SVHCW<sub>4</sub>, SVHCB<sub>4</sub>, SVHAW<sub>4</sub>, SVHAW<sub>4</sub>/18, SVHAB<sub>4</sub>, SVHXB<sub>4</sub>, SVHUW<sub>4</sub>, SVHUB<sub>4</sub>

HS<sub>4</sub>W, HS<sub>4</sub>B, HSR<sub>4</sub>W, HSR<sub>4</sub>W/18, HSR<sub>4</sub>B, HSR<sub>4</sub>B/18

| Model No.             | Description        | Color |
|-----------------------|--------------------|-------|
| HS <sub>4</sub> W     | Hood only          | White |
| HS <sub>4</sub> B     | Hood only          | Brown |
| HSR <sub>4</sub> W    | Hood only          | White |
| HSR <sub>4</sub> W/18 | Hood only          | White |
| HSR <sub>4</sub> B    | Hood only          | Brown |
| HSR <sub>4</sub> B/18 | Hood only          | Brown |
| SVHCW <sub>4</sub>    | Hood/pipe unassem. | White |
| SVHCB <sub>4</sub>    | Hood/pipe unassem. | Brown |
| SVHXB <sub>4</sub>    | Hood/pipe assem.   | White |
| SVHAW <sub>4</sub>    | Hood/pipe assem.   | White |
| SVHAB <sub>4</sub>    | Hood/pipe assem.   | Brown |
| SVHUW <sub>4</sub>    | Hood/pipe unassem. | White |
| SVHUB <sub>4</sub>    | Hood/pipe unassem. | Brown |

### Performance Data

for plastic molded vent hoods

#### Hood

- Calcium filled Polypropylene
- Melting point: 325° F+
- UV Inhibitor added

#### Pipe


- Aluminum

#### Collar


- High impact styrene

### General Information


- 4" dia. opening
- quick, easy installation
- louvered construction helps prevent wind and rain from entering vent
- opens with ease for maximum airflow
- durable weather resistant
- curved louvers for quieter operation

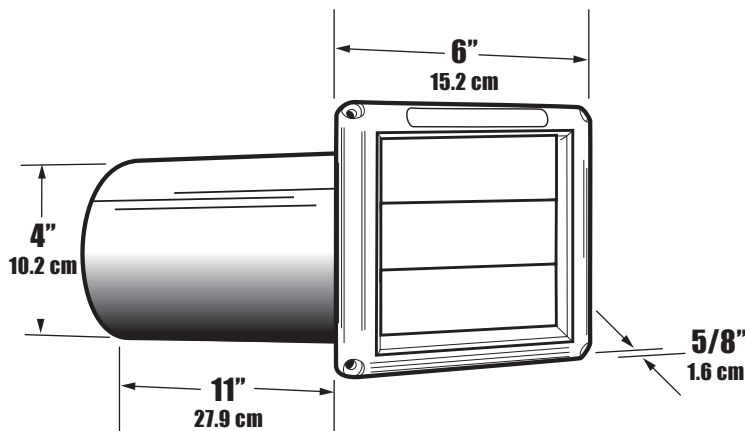

Molded for easy connection of pipe



Plastic collar



Rear View



Side View

| Hood Dia.    | CFM | Tested | p/d in/w.c. |
|--------------|-----|--------|-------------|
| 4" (10.2 cm) | 50  | ✓      | .045        |
| 4" (10.2 cm) | 75  | ✓      | .056        |
| 4" (10.2 cm) | 100 | ✓      | .052        |
| 4" (10.2 cm) | 125 | ✓      | .043        |
| 4" (10.2 cm) | 150 | ✓      | .042        |
| 4" (10.2 cm) | 175 | ✓      | .04         |
| 4" (10.2 cm) | 200 | ✓      | .032        |